


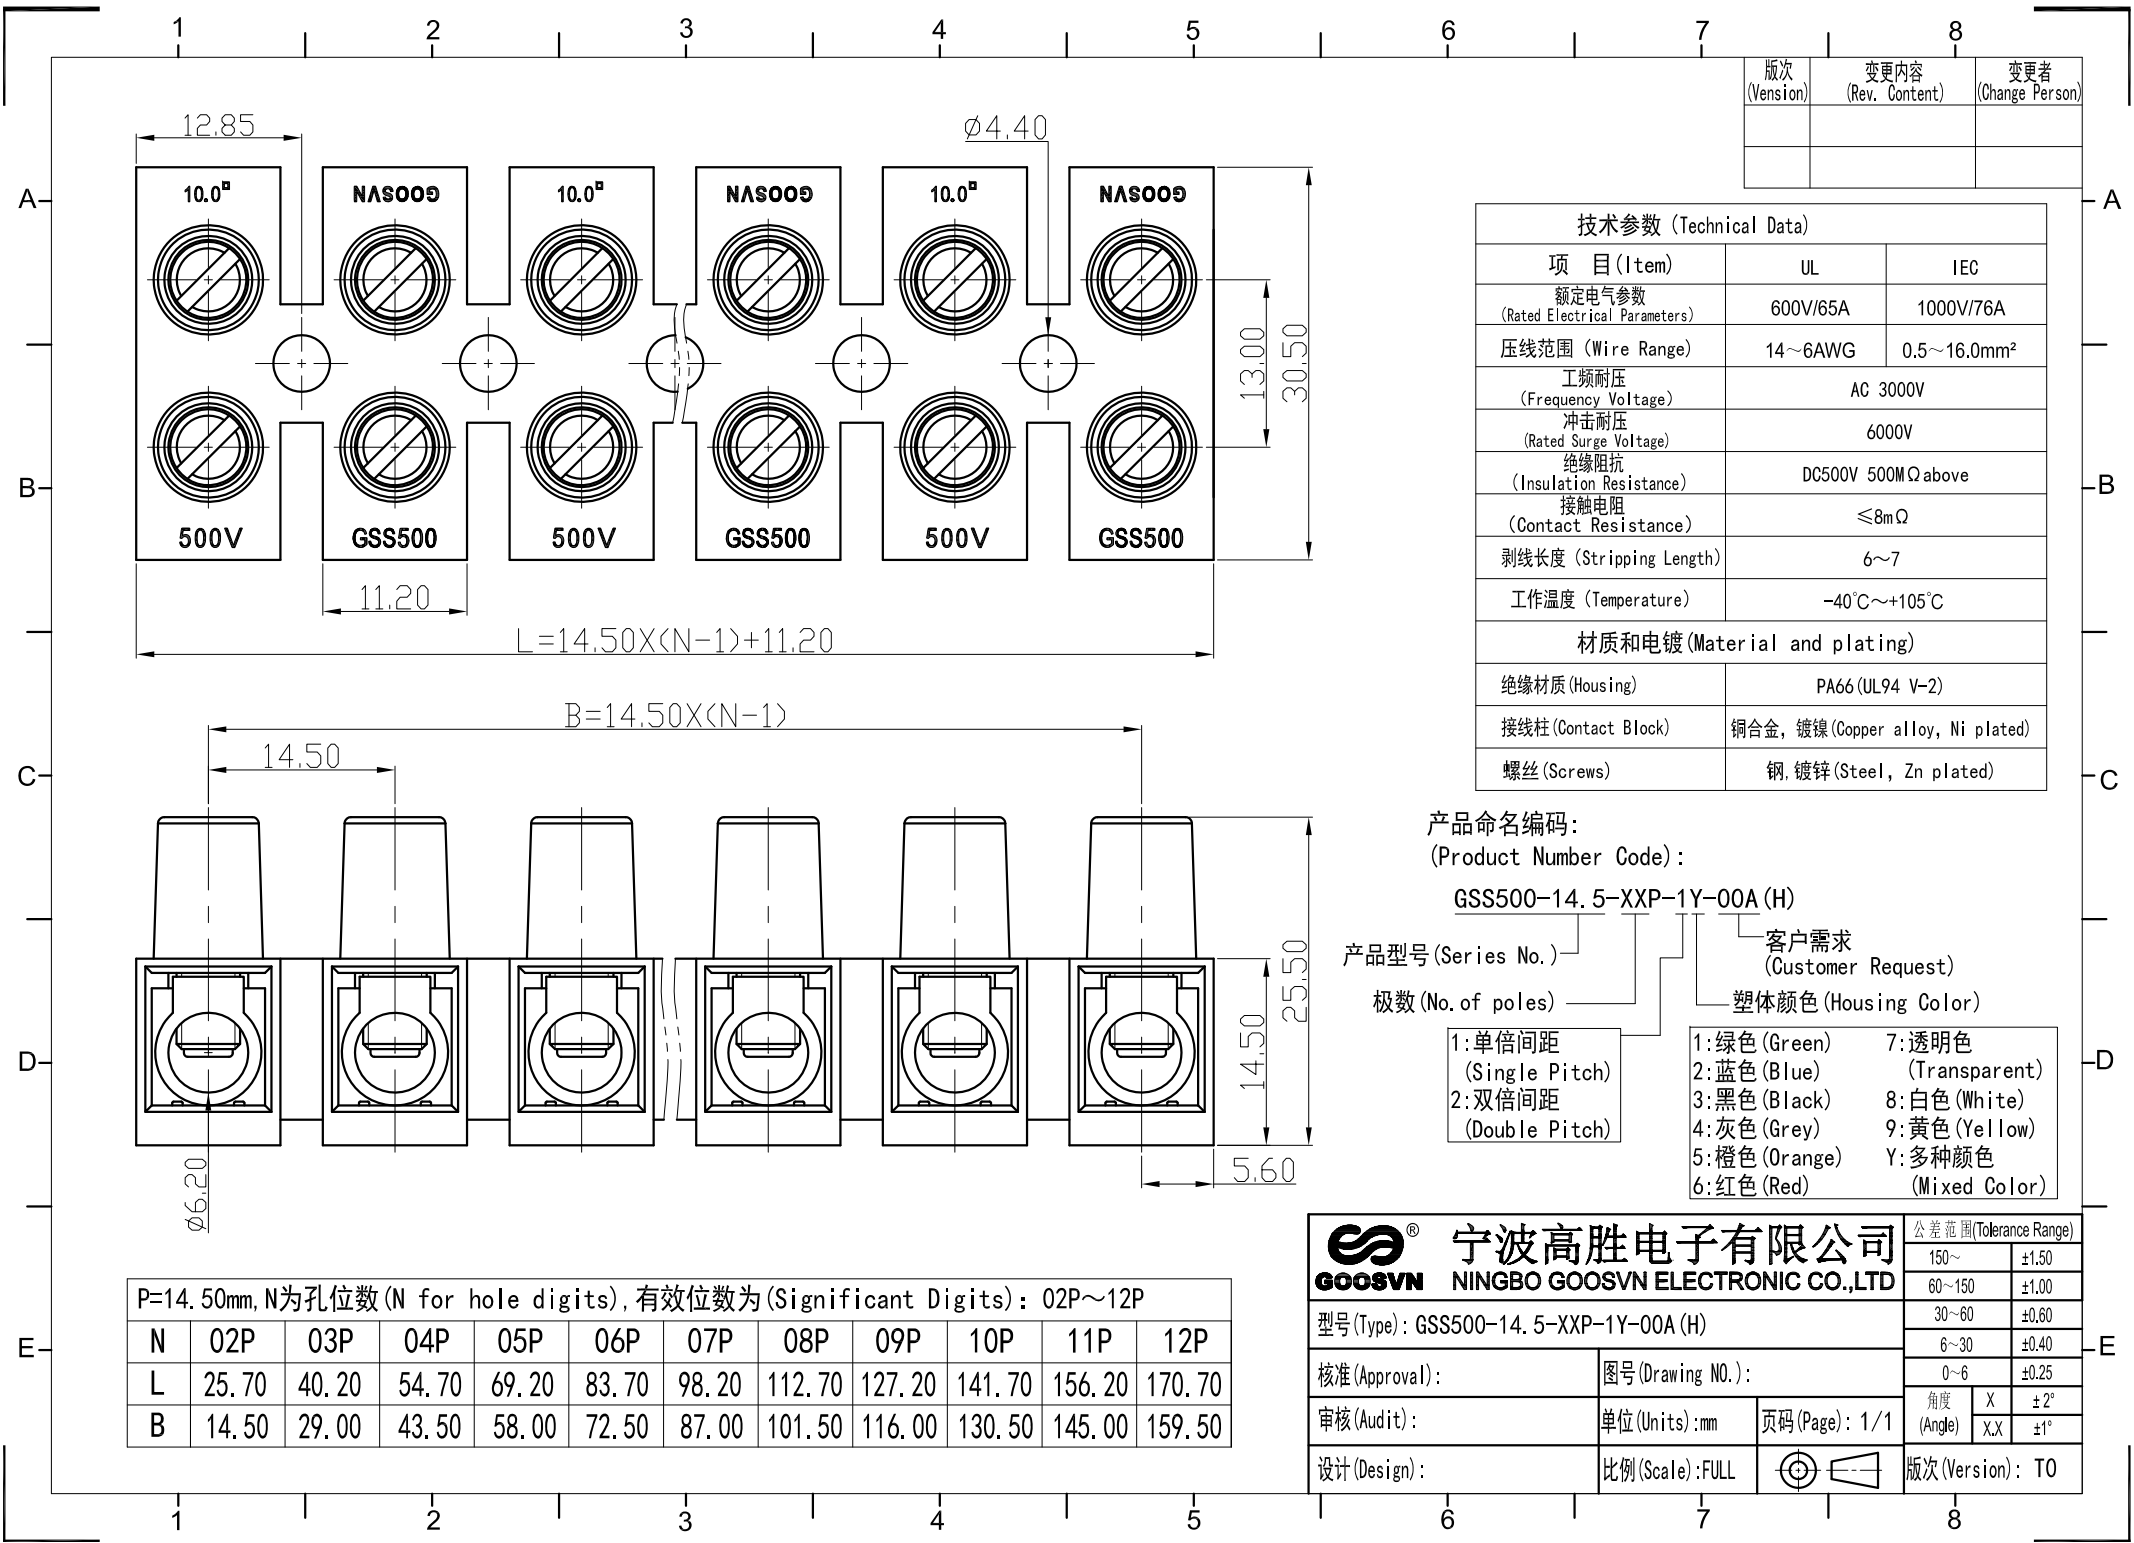

版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

技术参数 (Technical Data)		
项 目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	600V/65A	1000V/76A
压线范围 (Wire Range)	14~6AWG	0.5~16.0mm²
工频耐压 (Frequency Voltage)	AC 3000V	
冲击耐压 (Rated Surge Voltage)	6000V	
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above	
接触电阻 (Contact Resistance)	≤8mΩ	
剥线长度 (Stripping Length)	6~7	
工作温度 (Temperature)	-40℃~+105℃	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-2)	
接线柱 (Contact Block)	铜合金, 镀镍 (Copper alloy, Ni plated)	
螺丝 (Screws)	钢, 镀锌 (Steel, Zn plated)	

产品命名编码:
(Product Number Code):

GSS500-14.5-XXP-1Y-00A (H)

产品型号 (Series No.)

极数 (No. of poles)

1: 单倍间距
(Single Pitch)
2: 双倍间距
(Double Pitch)

客户需求
(Customer Request)

塑体颜色 (Housing Color)

1: 绿色 (Green) 7: 透明色
(Transparent)
2: 蓝色 (Blue) 8: 白色 (White)
3: 黑色 (Black) 9: 黄色 (Yellow)
4: 灰色 (Grey) Y: 多种颜色
5: 橙色 (Orange) Y: 多种颜色
6: 红色 (Red) (Mixed Color)

P=14.50mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 02P~12P											
N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P
L	25.70	40.20	54.70	69.20	83.70	98.20	112.70	127.20	141.70	156.20	170.70
B	14.50	29.00	43.50	58.00	72.50	87.00	101.50	116.00	130.50	145.00	159.50

公差范围 (Tolerance Range)	
150~	± 1.50
60~150	± 1.00
30~60	± 0.60
6~30	± 0.40
0~6	± 0.25
角度 (Angle)	X $\pm 2^{\circ}$ X.X $\pm 1^{\circ}$
设计 (Design):	比例 (Scale): FULL
审核 (Audit):	图号 (Drawing NO.):
核准 (Approval):	单位 (Units): mm
设计 (Design):	页码 (Page): 1/1
设计 (Design):	版次 (Version): T0