
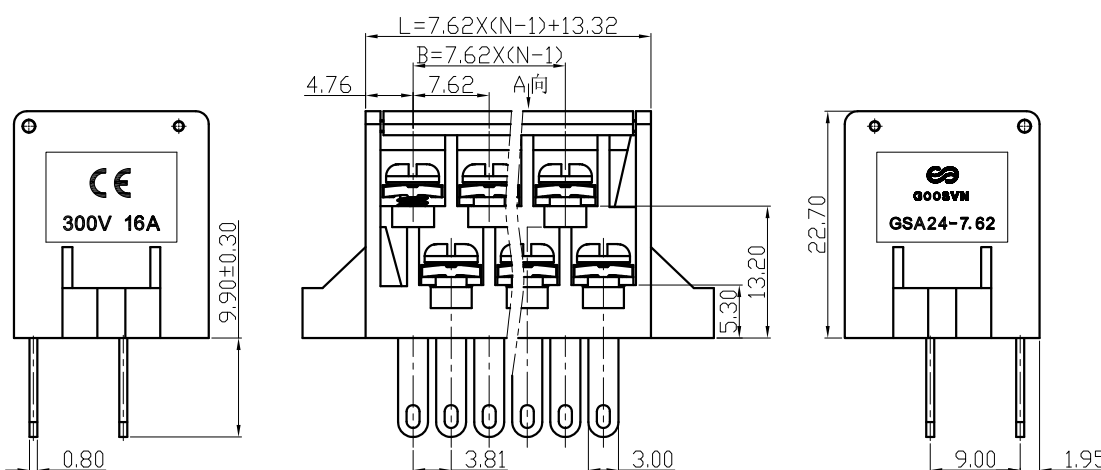


(W/O COVER)
A向

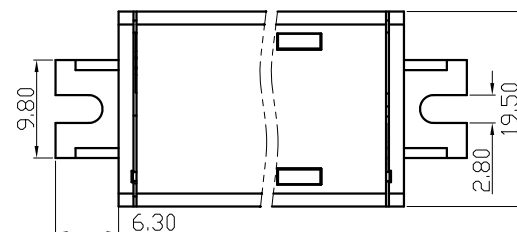

P=7.62mm, N为孔位数 (N for hole digits);有效位数为 (Significant Digits):2* (03P~16P)														
N	2*03P	2*04P	2*05P	2*06P	2*07P	2*08P	2*09P	2*10P	2*11P	2*12P	2*13P	2*14P	2*15P	2*16P
L	28.56	36.18	43.80	51.42	59.04	66.66	74.28	81.90	89.52	97.14	104.76	112.38	120.00	127.62
B	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06	106.68	114.30

版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

技术参数 (Technical Data)		
项 目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	300V/15A	320V/24A
压线范围 (Wire Range)	22~14AWG	2.5mm²
工频耐压 (Frequency Voltage)	AC 2500V	
冲击耐压 (Rated Surge Voltage)	4000V	
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above	
接触电阻 (Contact Resistance)	≤8mΩ	
剥线长度 (Stripping Length)	6~7mm	
工作温度 (Temperature)	-40℃~+105℃	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-0)	
触点材料 (Contact)	铜合金, 镀锡 (Copper alloy, Sn plated)	
螺丝 (Screws)	钢, 镀镍 (Steel, Nickel plating)	

产品命名编码:

(Product Number Code):

GSA24H-7.62-XXP-1Y-00A (H)

产品型号 (Series No.) 客户需求 (Customer Request)
极数 (No. of poles) 塑体颜色 (Housing Color)

- 1: 单倍间距 (Single Pitch)
2: 双倍间距 (Double Pitch)
- 1: 绿色 (Green)
2: 蓝色 (Blue)
3: 黑色 (Black)
4: 灰色 (Grey)
5: 橙色 (Orange)
6: 红色 (Red)
- 7: 透明色 (Transparent)
8: 白色 (White)
9: 黄色 (Yellow)
Y: 多种颜色 (Mixed Color)

宁波高胜电子有限公司 NINGBO GOOSVN ELECTRONIC CO.,LTD			公差范围 (Tolerance Range)	
			150~	±1.50
			60~150	±1.00
型号 (Type): GSA24H-7.62-XXP-1Y-00A (H)			30~60	±0.60
核准 (Approval):			6~30	±0.40
审核 (Audit):			0~6	±0.25
设计 (Design):			角度 (Angle)	X ±2° XX ±1°
比例 (Scale): FULL			页码 (Page): 1/1	版次 (Version): T0