
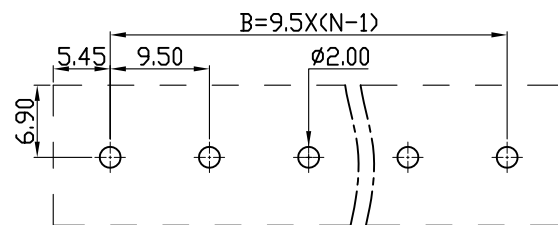
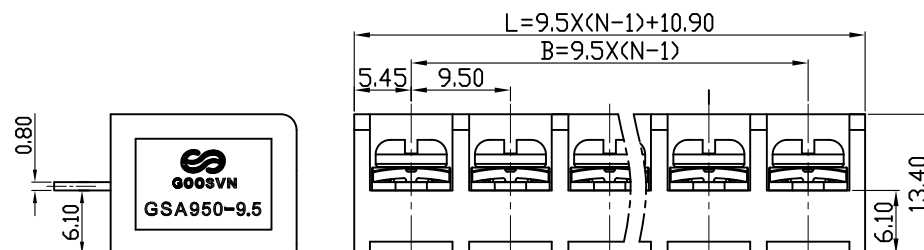


版次 (Version)	変更内容 (Rev. Content)	変更者 (Change Person)

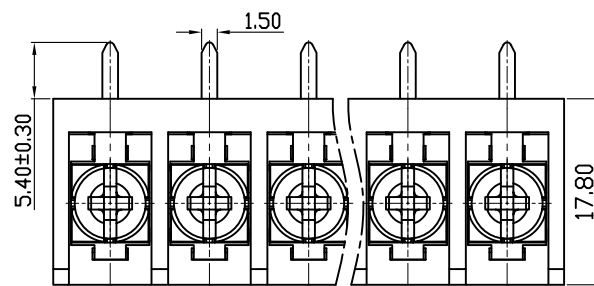

PCB LAYOUT

P=9.50mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 02P~13P												
N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	20.40	29.90	39.40	48.90	58.40	67.90	77.40	86.90	96.40	105.90	115.40	124.90
B	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00

技术参数 (Technical Data)		
项 目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	300V/20A	630V/32A
压线范围 (Wire Range)	22~12AWG	4.0mm²
工频耐压 (Frequency Voltage)	AC 2500V	
冲击耐压 (Rated Surge Voltage)	4000V	
绝缘电阻 (Insulation Resistance)	DC500V 500MΩ above	
接触电阻 (Contact Resistance)	≤8mΩ	
剥线长度 (Stripping Length)	6~7mm	
工作温度 (Temperature)	-40℃~-+105℃	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-0)	
触点材料 (Contact)	铜合金, 镀锡 (Copper alloy, Sn plating)	
螺丝 (Screws)	钢, 镀镍 (Steel, Nickel plating)	

产品命名编码:

(Product Number Code):

GSA950R-9.5-XXP-1Y-00A (H)

产品型号 (Series No.):

—客户需求


(Customer Request)

极数 (No. of poles)

—塑体颜色(Housing Color)

- 1:单倍间距
(Single Pitch)
2:双倍间距
(Double Pitch)

- | | |
|----------------|--------------------------|
| 1: 绿色 (Green) | 7: 透明色
(Transparent) |
| 2: 蓝色 (Blue) | 8: 白色 (White) |
| 3: 黑色 (Black) | 9: 黄色 (Yellow) |
| 4: 灰色 (Grey) | Y: 多种颜色
(Mixed Color) |
| 5: 橙色 (Orange) | |
| 6: 红色 (Red) | |

 宁波高胜电子有限公司 NINGBO GOOSVN ELECTRONIC CO.,LTD			公差范围(Tolerance Range) 150~ ±1.50 60~150 ±1.00 30~60 ±0.60 6~30 ±0.40 0~6 ±0.25	
型号(Type): GSA950R-9.5-XXP-1Y-00A (H)			角度(Angle) X ±2° X.X ±1°	
核准(Approval):	图号(Drawing NO.):			
审核(Audit):	单位(Units):mm	页码(Page): 1/1		
设计(Design):	比例(Scale):FULL		版次(Version): TO	